



TFP Ø 50 mm / 55 mm

Available until 31.03.2022

TFP Ø 18 mm

No longer available!



Successor: TSB

One sensor for all applications!

Successor: TSM

New, modular and better!



HYGIENIC BY DESIGN

ANDERSON-NEGELE

All advantages at anderson-negele.com

Product Information TFP-49, -69, -169, -189, -06

FOOD

Temperature Sensor without thread

Application/Specified usage

- Installation in thin-walled pipes and vessels
- No product contacting of the sensor (with thermowell)
- Demounting the sensor without opening the process

Application examples

- Process monitoring in pipes
- Temperature measurement in pressure pipes
- Measurement of paste products in pipes

Hygienic design/Process connection

- Hygienic and easy sterilizable installation by weld-in sleeve (e.g. EMK-25/76) or weld-in thermowell (e.g. ESH-KM12/...).
- By elastomer free sealing system the connection is free of gaps and crevices
- CIP-/SIP-cleaning up to 140 °C
- Product contacting materials compliant to FDA
- Sensor and head completely made of stainless steel

Features

- Variable insertion depths
- Integrated transmitter (optional)
- Different types of electrical connections possible

Options/Accessories

- 2 x Pt100 (not retrofittable)
- 2 x Pt100 with two transmitters (not retrofittable)
- Programmable transmitters MPU-4 and MPU-M with output 4...20 mA, 2-wire
- Integrated transmitters for HART-protocol
- Programming adapter MPU-P 9701
- Integrated transmitter MPU-LCD with display in connecting head
- Pt100 chip with other classes of accuracy (1/3B, 1/10B)
- Fast response sensor tip 3 mm and 4 mm
- Pre-assembled connecting cable for M12 plug
- Fixed cable in other lengths and material available

Accessories

PVC-cable with M12-connection made of 1.4305, IP 69 K, unshielded

M12-PVC / 4-5 m	PVC-cable 4-pin, length 5 m
M12-PVC / 4-10 m	PVC-cable 4-pin, length 10 m
M12-PVC / 4-25 m	PVC-cable 4-pin, length 25 m

Authorizations



Temperature sensor TFP-49



Temperature sensor TFP-169 with transmitter MPU-M



PVC-cable with M12-connection




Temperature sensor		
Process connection		gap-free with weld-in sleeve, e.g. EMK-25/76 or weld-in thermowell, e.g. ESH-KM12/...
Insertion length EL	standard	50...500 mm
Materials	connecting head thermowell	stainless steel 1.4301 (AISI 304) stainless steel 1.4404 (AISI 316L)
Operating pressure	with weld-in sleeve with weld-in thermowell	10 bar maximum 50 bar maximum
Temperature ranges	ambient sensor tip	-50...+85 °C -50...+250 °C
Sensing resistor	acc. to DIN EN 60751	Pt100
Electrical connection	cable gland cabel connection fixed cable 2,5 m fixed cable 2,5 m (≥ 90 °C)	M16 x 1,5 M12 plug 1.4301 (AISI 304), 4-pins LIYY 4 x 0,25 mm ² PTFE 4 x 0,14 mm ²
Protection class	TFP-49, -169, -189 TFP-06	IP 69 K (with cable connection) IP 68

Transmitter MPU-4, MPU-H, MPU-M		
Temperature ranges	ambient storage	-40...+85 °C -55...+90 °C
Measuring ranges	MPU-4, MPU-H, MPU-M	standard: -10...40 °C, 0...50 / 100 / 150 / 200 °C special ranges free programmable
Accuracy	input	< ±0.25 °C
Temperature drift	zero, span	< 0.01 % / K
Supply	MPU-4, MPU-H, MPU-M accuracy	8...35 V DC 0.01 % / V (reference: 12 V DC)
Output	signal accuracy burden	analog 4...20 mA < ±0.1 % of measurement range < 600 Ω (at U _B = 24 V)
Humidity	without condensation	0...98 %


Accuracy classes of temperature sensors Tolerances for Pt100 acc. to DIN EN 60751			
Pt100	A	1/3 B	1/10 B
0 °C / 100 Ω	±0,15 K / ±0,06 Ω	±0,10 K / ±0,04 Ω	±0,03 K / ±0,01 Ω
100 °C / 138,5 Ω	±0,35 K / ±0,13 Ω	±0,27 K / ±0,10 Ω	±0,08 K / ±0,03 Ω

Electrical connection without transmitter

With 1 x M12 plug




Configuration 1st M12 plug



Electrical connection with transmitter


With M12 plug




Configuration M12 plug

- 1: + supply
- 2: - supply 4...20 mA
- 3: not connected
- 4: not connected


With 2 x M12 plug




Configuration 2nd M12 plug




With cable gland

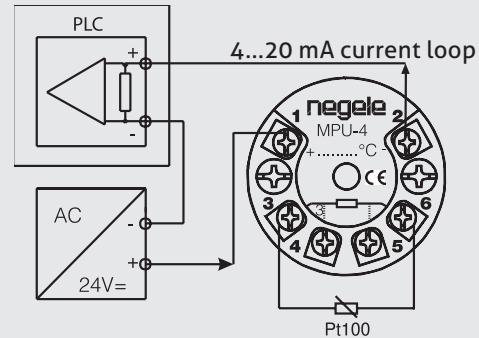

With cable gland



Configuration strip terminal




clamps for 1st Pt100

clamps for 2nd Pt100
(at version 2 x Pt100)

Electrical connection with two transmitter (TFP-69)

With 1 x M12 plug (sensor 1 + sensor 2)




Configuration M12 plug

- 1: + supply (sensor 1)
- 2: - supply 4...20 mA (sensor 1)
- 3: - supply 4...20 mA (sensor 2)
- 4: + supply (sensor 2)


With fixed cable

Fixed cable connection
with 1 x Pt100


wh ye bn gn standard
rd rd wh wh PTFE

Fixed cable connection
with 2 x Pt100 (LIYY)


wh ye bn gn 1st Pt100
rd bu pk gy 2nd Pt100

Fixed cable connection
with 2 x Pt100 (PTFE)

rd rd wh 1st Pt100
vt vt ye 2nd Pt100




With 2 x M12 plug (sensor 1)



Configuration M12 plug

- 1: + supply (sensor 1)
- 2: - supply 4...20 mA (sensor 1)
- 3: not connected
- 4: not connected


With 2 x M12 plug (sensor 2)




Configuration M12 plug

- 1: + supply (sensor 2)
- 2: - supply 4...20 mA (sensor 2)
- 3: not connected
- 4: not connected


TFP-49 | TFP-49.2

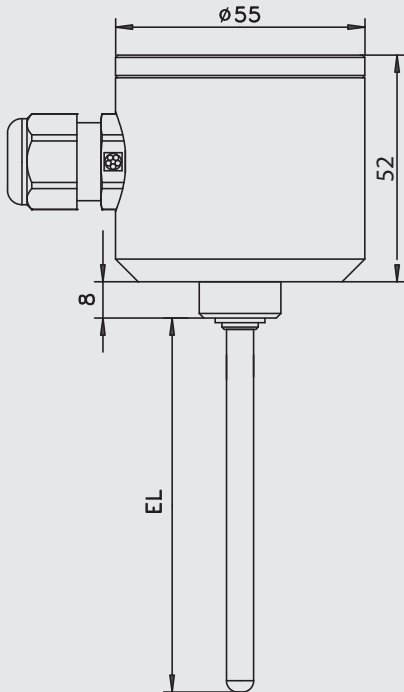


TFP-69

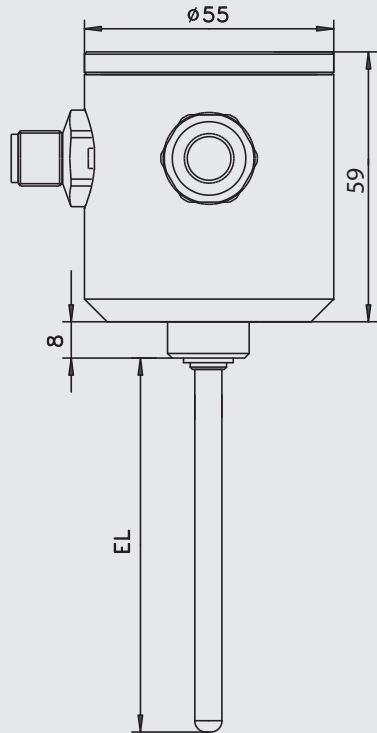


TFP-06

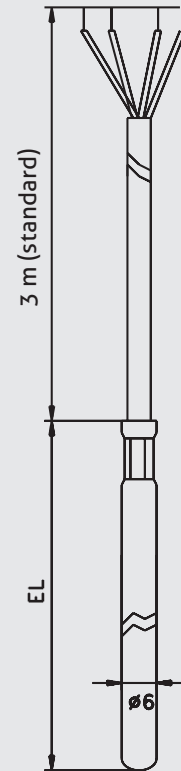


TFP-169

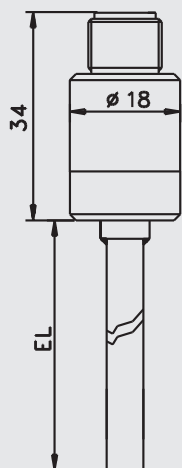

TFP-169 / ... / MPU-M

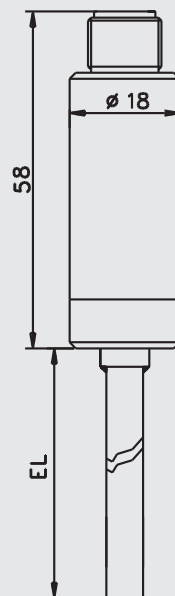

TFP-189 | TFP-189.2

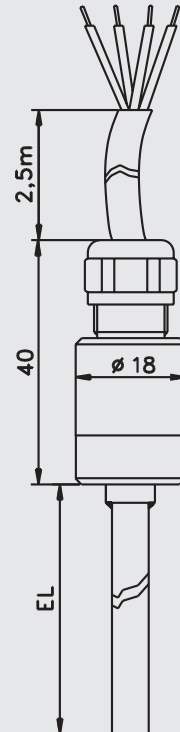


Sensor tip diameter and response time

All temperature sensors are available with smaller sensor tips, to ensure a shorter response time. The below-mentioned times were measured by immersing a temperature sensor from room temperature into boiling water.


Sensor tip Ø 6 mm with thermowell

50 %-time: $t_{50} \leq 8.8 \text{ s}$
90 %-time: $t_{90} \leq 24.5 \text{ s}$

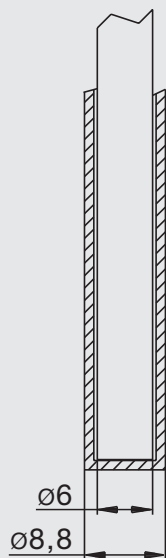


Sensor tip Ø 6 mm

50 %-time: $t_{50} \leq 3.0 \text{ s}$
90 %-time: $t_{90} \leq 8.0 \text{ s}$

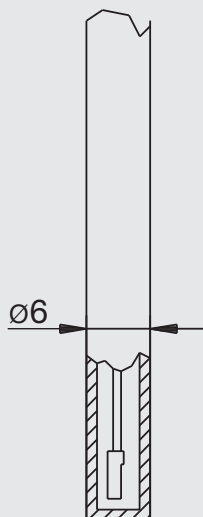


Sensor tip Ø 4 mm

50 %-time: $t_{50} \leq 2.4 \text{ s}$
90 %-time: $t_{90} \leq 6.5 \text{ s}$

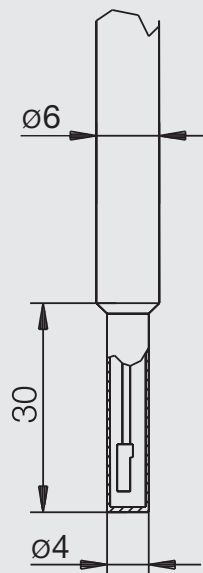

Sensor tip Ø 3 mm

50 %-time: $t_{50} \leq 0.5 \text{ s}$
90 %-time: $t_{90} \leq 1.5 \text{ s}$

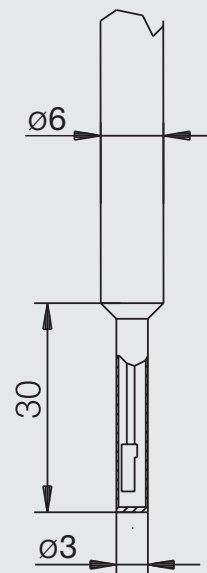

Note



When using weld-in thermowells we recommend to use heat-conductive paste too. This can reduce the response time up to 50 %.

Mechanical Connection / Installation

- Check the compatibility of the sensor length to the used thermowell.

Conventional Usage

- Not suitable for applications in explosive areas.
- Not suitable for applications in security-relevant equipments (SIL).

Transport / Storage

- No outdoor storage
- Dry and dust free
- Not exposed to corrosive media
- Protected against solar radiation
- Avoiding mechanical shock and vibration
- Storage temperature -55...+90 °C
- Relative humidity maximum 98 %

Standards and Guidelines

- You have to comply with applicable regulations and directives.

Cleaning / Maintenance

- In case of using pressure washers, don't point nozzle directly to electrical connections!

Note on CE

- Applicable directives:
Electromagnetic Compatibility Directive 2014/30/EU
- Compliance with the applicable EU directives is identified by the CE label on the product.
- The operating company is responsible for complying with the guidelines applicable to the entire installation.

Reshipment

- Sensors shall be clean and free of media or heat-conductive paste and must not be contaminated with dangerous media!
- Use suitable transport packaging only to avoid damage of the equipment!

Disposal

- Electrical devices should not be disposed of with household trash. They must be recycled in accordance with national laws and regulations.
- Take the device directly to a specialized recycling company and do not use municipal collection points.

Temperature Transmitter MPU-LCD with Display

Application / Specified Usage

- 4...20mA transmitter with LCD for Pt100 temperature sensor
- For installation in temperature sensor
- Sensor monitoring

Features

- 4-digit display with green backlight
- Temperature measurement in °C and °F
- Easy range select by one button
- Lower costs for wiring because of 2-wire technology

Note

See product information „MPU-LCD“ for details.

**Option MPU-LCD
(display in the connection head)**

Order Code for version with 1 x Pt100

TFP-49	(connecting head Ø 55 mm)
TFP-169	(connecting head Ø 18 mm, electrical connection M12 plug)
TFP-189	(sensor with head Ø 18 mm, electrical connection 2,5 m PVC-cable; no transmitter possible)
TFP-06	(sensor without connecting head, with 3 m PVC-cable, other lengths: on request)
TFP-06- IP68	(sensor without conn. head, prot. cl. IP 68, with 3 m PTFE-cable, other lengths: on request)

Sensor length EL in mm

050...250

xxx

(special length)

Diameter thermowell in mm

6

8

10

12

Diameter sensor tip in mm

X (no reduction)

3 (only for thermowell 6 mm)

4 (only for thermowell 6 mm and 8 mm;
no extra charge for sensor length 20 mm)

6 (only for thermowell 8 mm and 10 mm)

8 (only for thermowell 12 mm)

Accuracy Class

A

1/3B

1/10B

Electrical connection

(not selectable at TFP-169 and -189, -06 and -06-IP68)

PG (cable gland M16x1,5)

M12 (M12 plug, standard with MPU-LCD)

Transmitter

X (without)

only for TFP-49

MPU-4 (programmable)

MPU-H (HART-protocol)

MPU-LCD (with display)

only for TFP-169

MPU-M (programmable)

Measuring range MPU

(only for types with transmitter;
not at MPU-LCD)

-10...40 (range -10...40 °C)

0...50 (range 0...50 °C)

0...100 (range 0...100 °C)

0...150 (range 0...150 °C)

0...200 (range 0...200 °C)

xx...yy (special range)



TFP Ø 50 mm / 55 mm

Available until 31.03.2022

TFP Ø 18 mm

No longer available!



Successor: TSB

One sensor for all applications!

Successor: TSM

New, modular and better!

All advantages at anderson-negele.com

TFP-49 /

100 /

6 /

6 /

A /

M12 /

MPU-4 /

0...100 °C

Order code for version with 2 x Pt100

TFP-49.2 (connecting head Ø 55 mm, 2 x Pt100, no transmitter possible!)

TFP-69 (higher connecting head Ø 55 mm, 2 x Pt100, prepared for 2 x transmitter)

TFP-189.2 (connecting head Ø 18 mm, electrical connection 2,5 m PTFE-cable; other lengths: see at accessories)

Sensor length in mm

020...500 (in steps of 5 mm)

xxx (special length)

Diameter thermowell in mm

6

8

10

12

Diameter sensor tip in mm

X (no reduction)

3 (only with thermowell 6 mm)

4 (only with thermowell 6 mm and 8 mm)

6 (only with thermowell 8 mm and 10 mm)

8 (only with thermowell 12 mm)

Accuracy class Pt100

A

1/3B

1/10B

Electrical connection (only for TFP-49.2)

PG (cable gland M16x1,5)

2PG (2 x cable gland M16x1,5)

2M12 (2 x M12 plug)

Electrical connection (only for TFP-69)

M12 (M12 plug)

2M12 (2 x M12 plug)

Continue if TFP-61 or TFP-61-H is selected!

No further options for TFP-49.2, and TFP-189.2!

1. Transmitter

MPU-4 (programmable)

Measuring range 1. MPU

-10...40 (measuring range -10...40 °C)

0...50 (measuring range 0...+50 °C)

0...100 (measuring range 0...+100 °C)

0...150 (measuring range 0...+150 °C)

0...200 (measuring range 0...+200 °C)

xx...yy (special range)

2. Transmitter

MPU-4 (programmable)

Measuring range 2. MPU

-10...40 (-10...40 °C)

0...50 (0...+50 °C)

0...100 (0...+100 °C)

0...150 (0...+150 °C)

0...200 (0...+200 °C)

xx...yy (special)



TFP Ø 50 mm / 55 mm
Available until 31.03.2022

TFP Ø 18 mm
No longer available!



Successor: TSB
One sensor for all applications!

Successor: TSM
New, modular and better!

All advantages at anderson-negele.com

TFP-69 / 100 / 6 / X / A / M12 / MPU-4 / 0...50 / MPU-4 / 0...50